

REV	DESCRIPTION	DATE
A/0	原始版本	
A/1	修订版本	

Materials

- ①Button:PBT UL 94V-0
②Cover:PBT UL 94V-0
Thermoplastic:Blue, Red, Black
③BaSe:PBT UL 94V-0
④Tape Sealed:Polyester Film
⑤Terminal & Movable Contact:Copper Alloy
with Gold Plated

Specifications

- Contact Rating
Switching:25mA, 24VDC
Non-Switchin:100mA, 50VDC
Contact Resistance
Initial:50mΩ Max
After Life Test:100mΩ Max
Insulation Resistance:100MΩ Min at 500VDC
Dielectric Strength:500VDC/1 minute
Operating Force:1000g Max
Mechanical Life:5000 cycles
Electrical Life:2000 cycles

Packaging Information







- All DIP switches are shipped in Tube
Actuators all in "OFF" position

产品命名编码

DP - xx - X - T - XXXX
① ② ③ ④ ⑤

序 号	说 明
①产品系列	DS=平拨开关, DP=侧拨开关, DA=平拨弯脚开关
②产品P数	01=1P, 02=2P, 03=3P, 04=4P, 05=5P, 06=6P, 07=7P, 08=8P, 09=9P, 10=10P, 12=12P
③外壳颜色	R=红色, E=蓝色, K=黑色
④包装方式	T=管装
⑤客户需求	客户其他需求

未 注 公 差				单位	比例	Design Units	SIZE	页码				
X. ° ±5° X.X° ±2° X.XX° ±1°				MM Only	_____	METRIC	A4					
X.	X.X	X.XX	X.XXX	材料	品名	拨码开关		Part No				
±0.25	±0.2	±0.15	±0.05	见图解	图号	DP-xx-×-T						
制作	审核	批准	珠海 诚 思 科 技 有 限 公 司									
			ZhuHai ChengSi Technology Co.,Ltd									

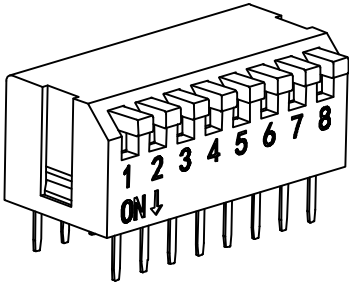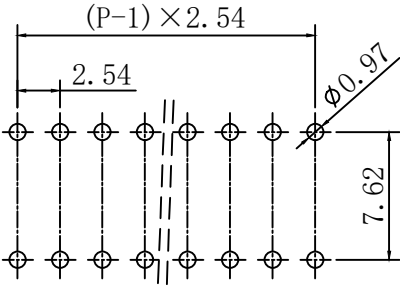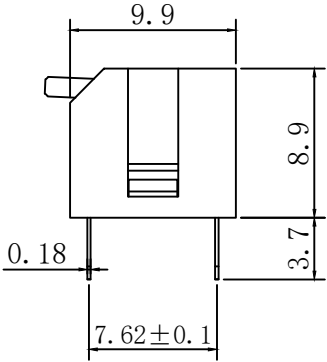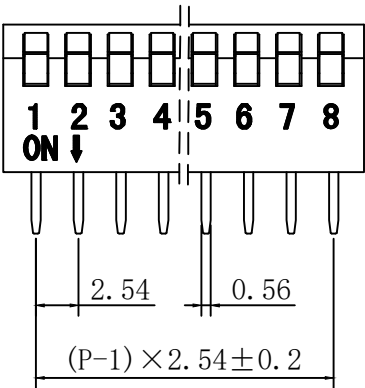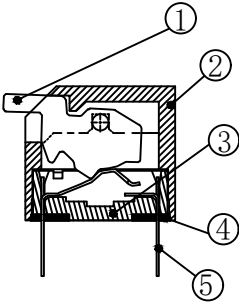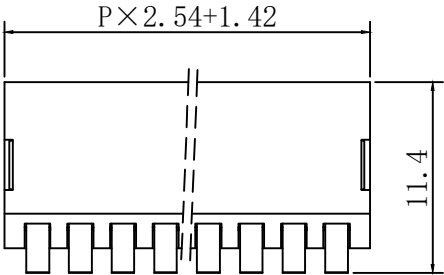

PCB LAYOUT