


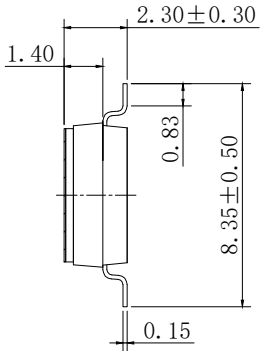


REV	DESCRIPTION	DATE
A/0	原始版本	
A/1	修订版本	

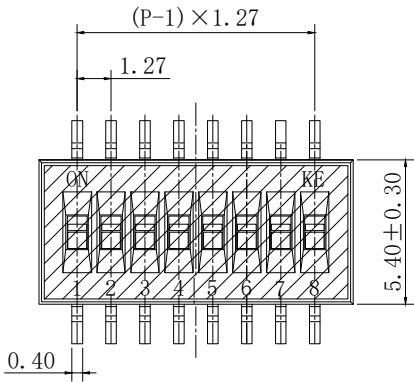

NOTES:

1.Specification:

Operating Force:1000gf Max
Operating Temperature:-40℃ to +85℃
Storage Temperature:-40℃ to +85℃
Electrical Life:1000cycles 25mA 24VDC
Mechanical Life:3000cycles Operations

2. PLATING



GOLD FLASH 1u"(min) SOLDER TALL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDER PLATING OVER ALL.

3. PART NUMBER DESCRIPTION


产品命名编码

DSHP - XX - T S G E R
① ② ③ ④ ⑤ ⑥ ⑦

序 号	说 明
①产品系列	DSHP
②产品P数	01=1P, 02=2P, 03=3P, 04=4P, 05=5P, 06=6P, 07=7P, 08=8P, 09=9P, 10=10P
③推柄形态	T=低推贴胶 S=低推不贴胶 L=高推
④脚 型	S=贴片 H=插件 J=型
⑤电 镀	G=镀全金 S=内金(接触部) 外镀锡(焊脚部)
⑥电 镀 层	E=接触部3u" 焊脚部1-2u" G=接触部3u" 焊脚部3u" F=接触部10u" 焊脚部10u"
⑦包装方式	T=管装 R=卷装

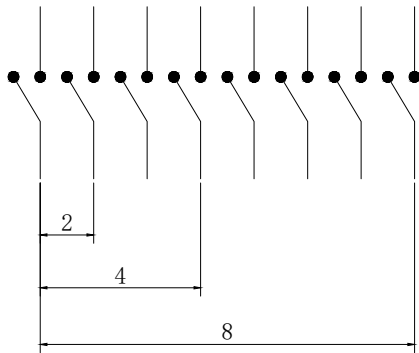

Circuitry Schematic

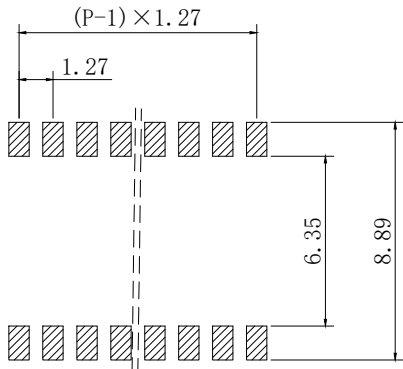

PCB LAYOUT

Number	Part Name	Material	Mark	未 注 公 差			单位	比例	Design Units	SIZE	页码	
①	Actuator	Nylon UL94V-0	White	X.° ±2° X.X° ±1° X.XX° ±0.5°			MM Only	_____	METRIC	A4		
②	Cover	PPS UL94V-0	Black				材料	品名	拨码开关		图号	
③	Movable	Beryllium Copper	3u"Gold	X.X	X.XX	X.XXX	见图解	Part No	DSHPXXTSGER			
④	Terminal	Brass	1u"Gold	±0.25	±0.15	±0.10	珠海诚思科技有限公司 ZhuHai ChengSi Technology Co.,Ltd					
⑤	Base	PPS UL94V-0	Black	制作	审核	批准						
⑥	Terminal Contact	Brass	3u"Gold									
⑦	Mylar	Polyimide UL94V-0	0.05mm									

ZhuHai ChengSi Technology Co.,Ltd